






AIR COOLED DIESEL ENGINE



NK178FA




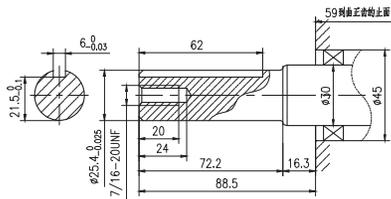


NK186F



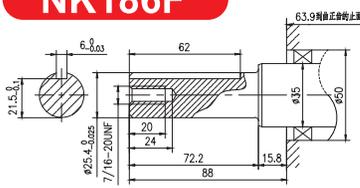



Model		NK178FA	NK186F
Engine Type		Single-cylinder vertical	4-stroke direct injection
Bore*Stroke	mm	78*64	86*70
Displacement	cc	306	406
Max Rotation Speed	rpm	3600	3600
Max Output Power	HP	8.0	9.5
Fuel Tank Capacity	Lt	3.5	5.5
Oil Capacity	ml	1100	1650
Fuel consumption	gr/Kw*h	<280	<270
Starter Model		Recoil or Electric	Recoil or Electric
Compression Ratio		19:1	19:1
Overall Dimension	mm	480x460x520	500x460x555
Weight	Kg	32/34	45/47
20GP/40GP/40HQ Loading	pcs	240/480/600	220/460/529
Emission Compliance		Available also in Stage V	

186FA Performance Curves

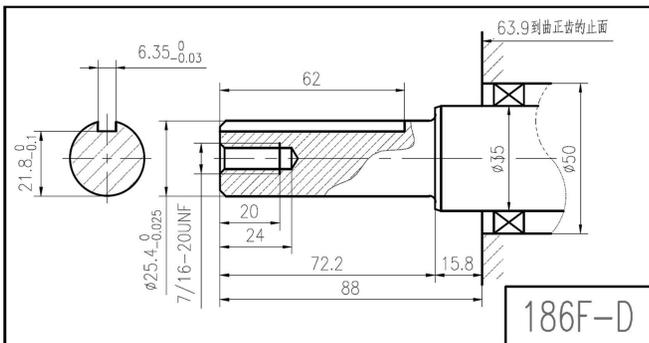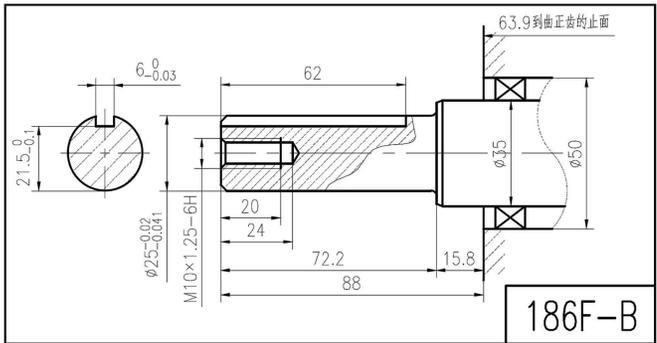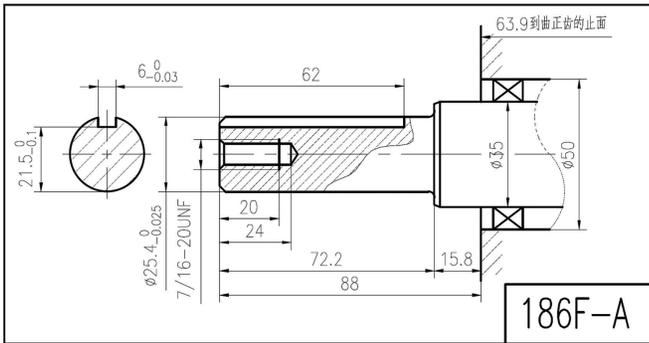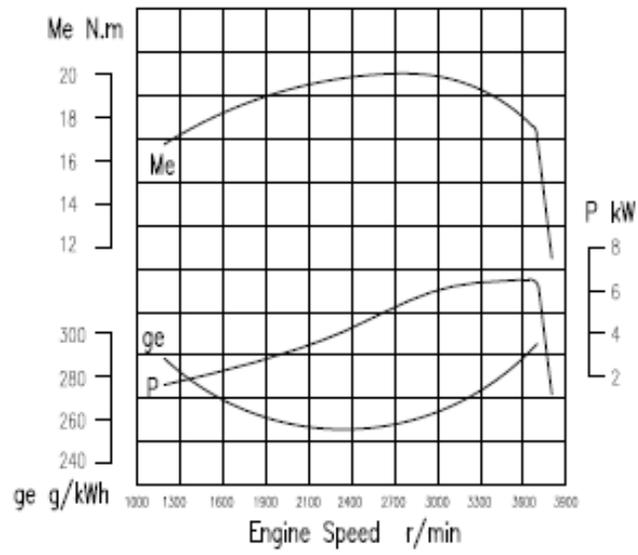

NK186F - NK192F
ALBERI CILINDRICI CON CHIAVETTA

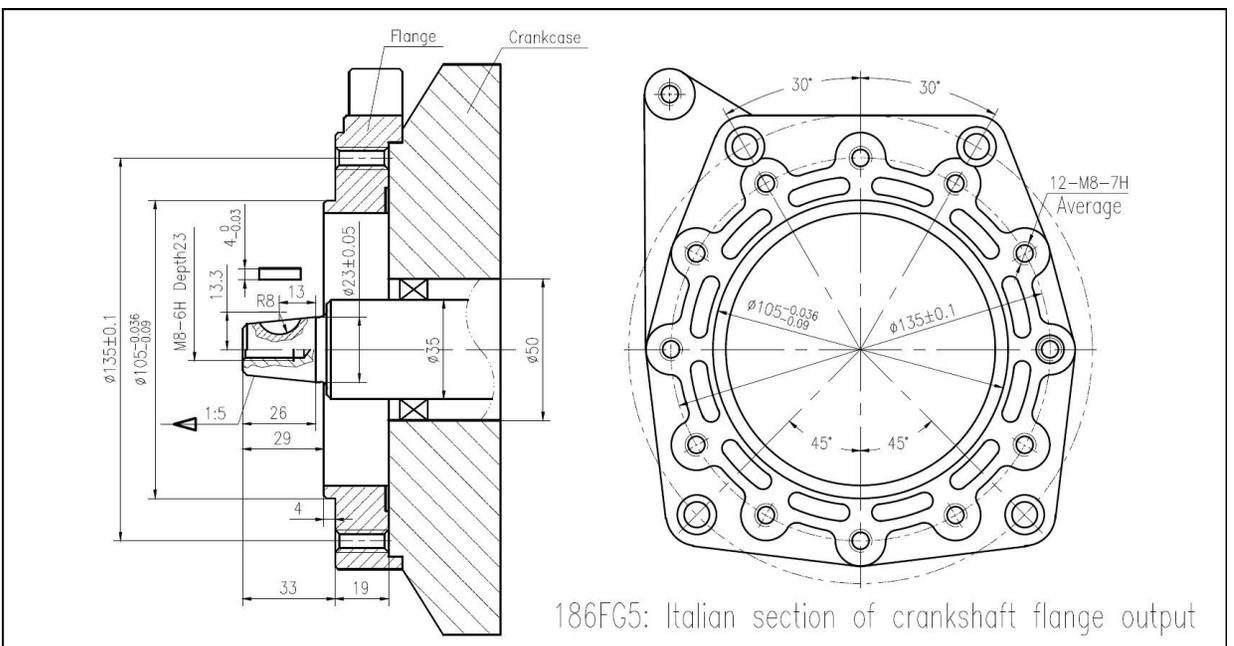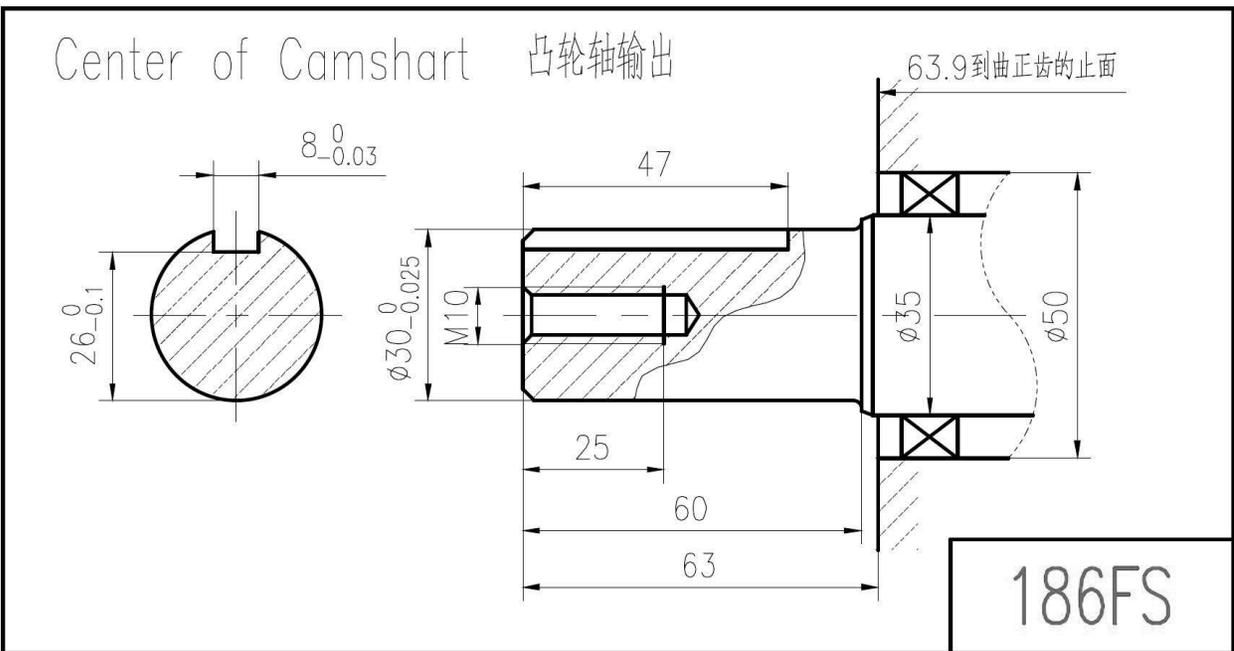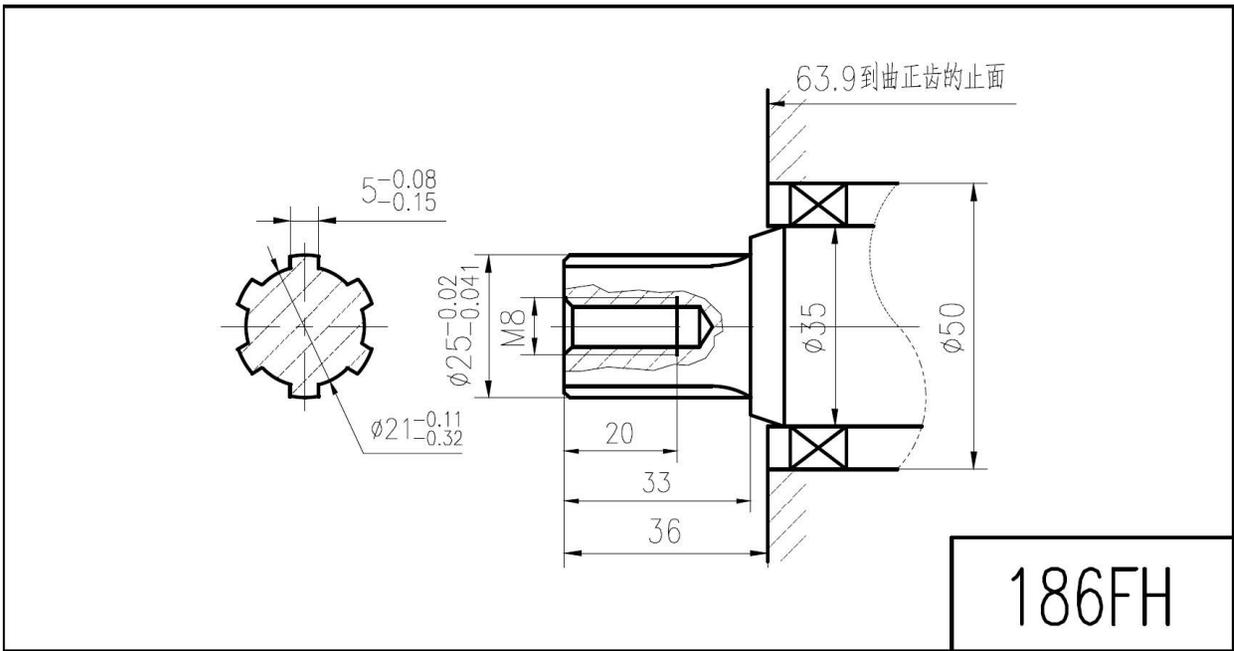

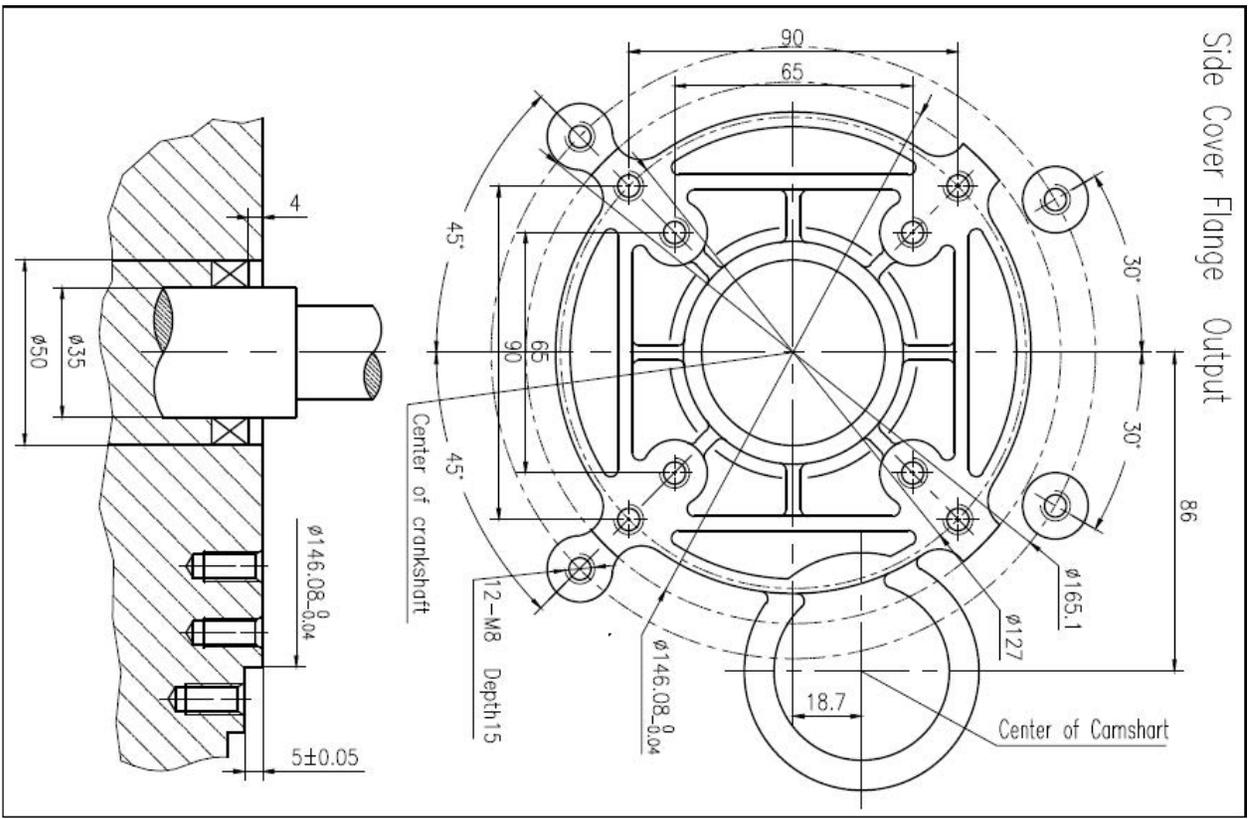

Model	Size:A (mm)	Size:B (mm)	Size:C (mm)	Size:D (mm)	Size:E (mm)	Size:F (mm)
SH186F/E	441	417	494	155	227	214

