



AIR COOLED DIESEL ENGINE




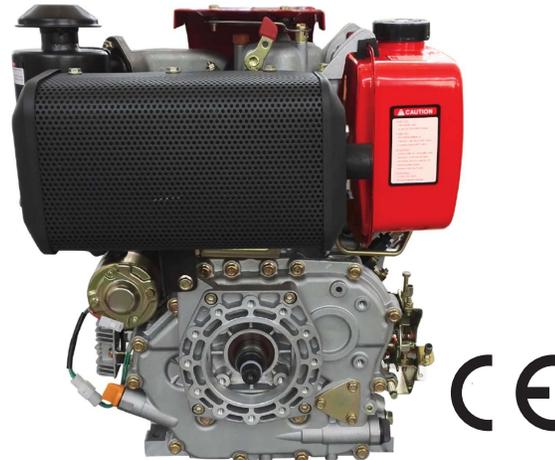


NK186FA/NK188FA





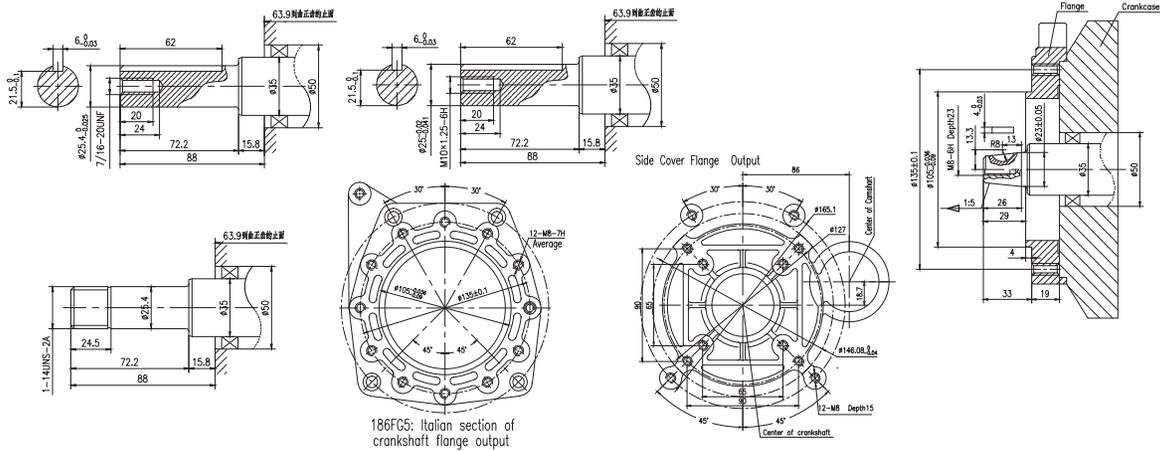


Model		NK186FA	NK188FA
Engine Type		Single-cylinder vertical	4-stroke direct injection
Bore*Stroke	mm	86*72	88*72
Displacement	cc	418	438
Max Rotation Speed	rpm	3600	3600
Max Output Power	HP	10	10.5
Fuel Tank Capacity	Lt	5.5	5.5
Oil Capacity	ml	1650	1650
Fuel consumption	gr/Kw*h	<270	<270
Starter Model		Recoil or Electric	Recoil or Electric
Compression Ratio		19:1	19:1
Overall Dimension	mm	500x460x555	500x460x555
Weight	Kg	45/47	46/48
20GP/40GP/40HQ Loading	pcs	220/460/529	220/460/529
Emission Compliance		Available also in Stage V	

188FB Performance Curves

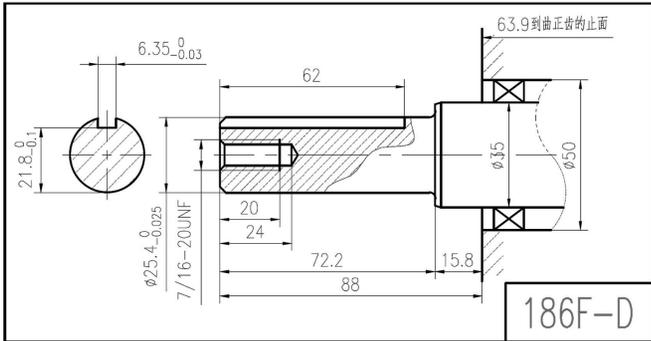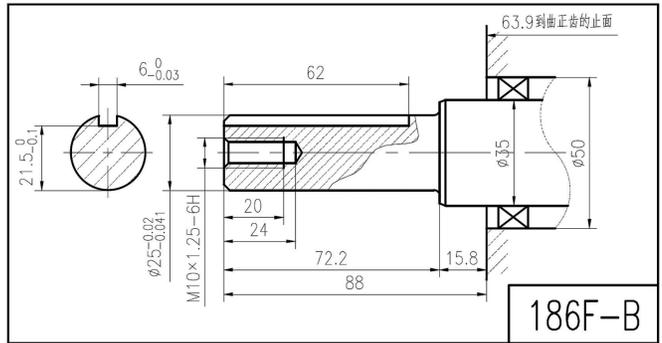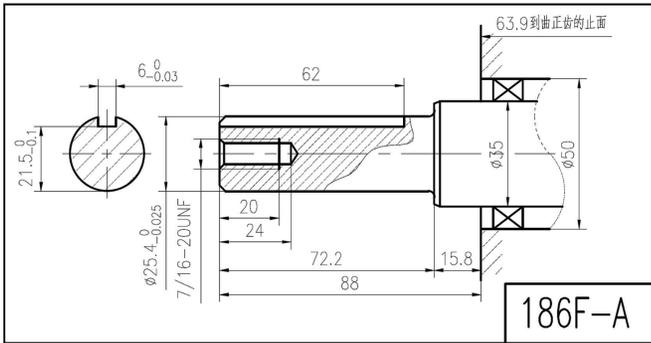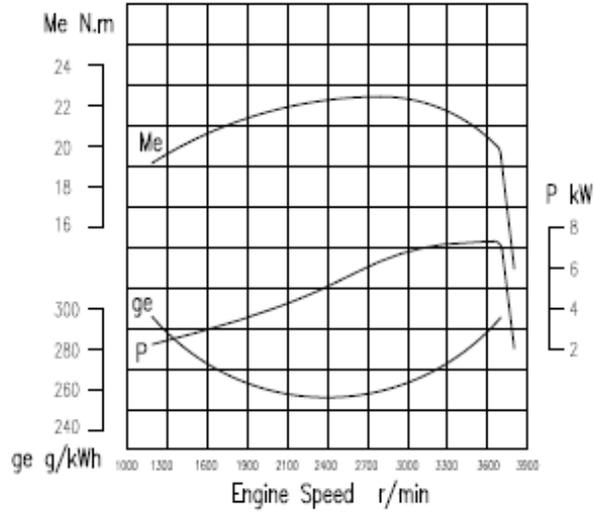

NK186F - NK192F
ALBERI CILINDRICI CON CHIAVETTA

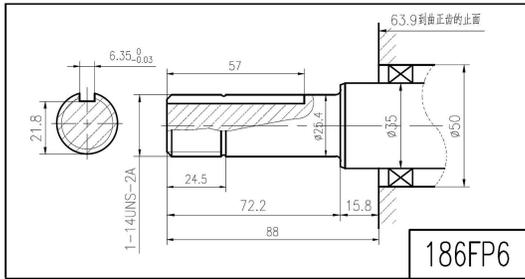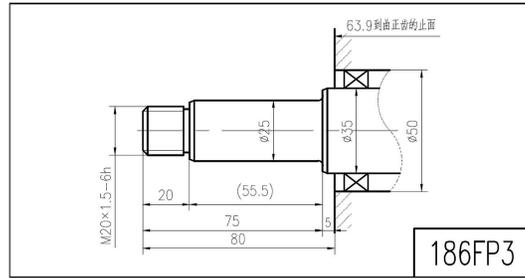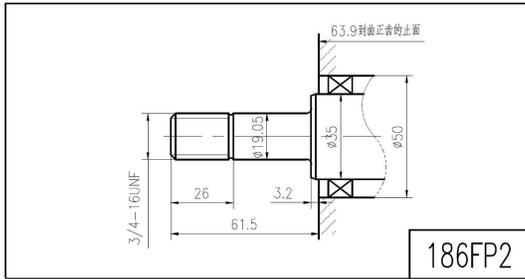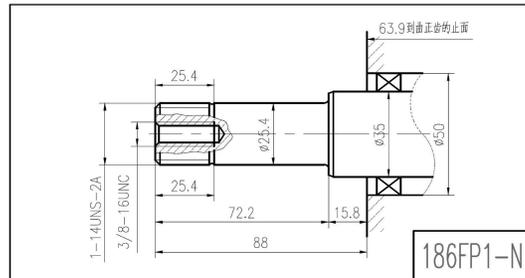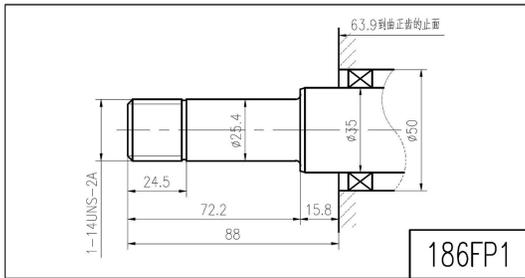

NK186F - NK192F
ALBERI CILINDRICI FILETTATI E
E FILETTATO CON CHIAVETTA

NK186F NK192F
ALBERI CONICI

